





## 70042

Code	Nominal lm/m	Real lm/m	W/m	CCT	LED/m
<b>70042/2700K</b>	1264	945	7	2700K	140
<b>70042/C</b>	1330	994	7	3000K	140
<b>70042/N</b>	1490	1113	7	4000K	140
<b>70042/F</b>	1490	1113	7	6000K	140

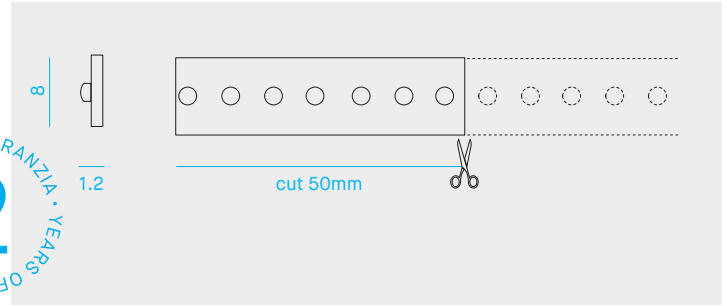

Striscia LED da interno di 5 metri.

LED strip for indoor use of 5m.

Bandeau LED pour l'intérieur de 5 mètres.

LED Lichtband für innen von 5 Meter.

LED 2835, montato su nastro flessibile autoadesivo 3M.

2835 LED, assembled on flexible 3M sticky tape.

LED 2835, réalisé sur circuit flexible 3M autocollant.

LED 2835, im Stromkreis realisiert flexibler Aufkleber 3M.

Life time 30.000h (rendimento 70%).

Life time 30.000h (70% lumen maintenance).

Durée de vie 30.000h (rendement 70%).

Lebensdauer 30.000h (Lichtstrom 70%).

È possibile tagliare o piegare il nastro ogni 50mm (7 LED). Lunghezza massima consentita del nastro è 5 metri.

Possible flexible and cut points every 50mm (7 LEDs). Maximum length allowed for the tape is 5m.

Le bandeau peut être coupé ou plié tous les 50mm (7 LEDs). Longueur maximum pour le circuit flexible 5 mètres.

Alle 50mm (7 LED) schneid- oder biegsam. Maximal zulässige Länge des Bandes beträgt 5 Meter.

Profili in alluminio da ordinare separatamente, (idonei per una adeguata dissipazione del calore).

Aluminium profiles to be ordered separately, (suggested for a suitable heat dissipation).

Profils en aluminium à commander séparément (pour une correcte dissipation de la chaleur).



Aluminiumprofile separat zu bestellen (wichtig für eine ausreichende Wärmeableitung).

Il collegamento di più strisce LED ad un solo alimentatore va effettuato in parallelo.

In case more LED strips have to be connected to one power supply, connect them in parallel.

Il est possible de brancher en parallèle plusieurs bandeaux sur la même alimentation.

Mehrere LED-Lichtbänder sollten parallelgeschaltet werden.

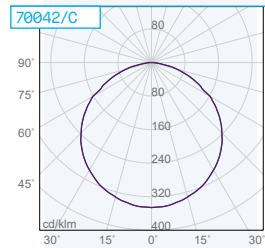

### Alimentatori da ordinare separatamente — Power supplies to be ordered separately - Unités d'alimentation à commander séparément — Netzgerät separat zu bestellen

Code IP20	W	max m
<b>5855</b>	20	2.5
<b>5674</b>	70	8.0
<b>5678</b>	75	9.0
<b>5677</b>	120	14.0
<b>5675</b>	150	18.0

Code IP20	W	max m
<b>5801</b> (PUSH/DIM1-10V)	100	12.0
<b>5802/T</b> (PUSH/DALI)	100	12.0

Code IP67	W	max m
<b>5788</b>	25	3.0
<b>5789</b>	40	4.5
<b>5782</b>	60	7.0
<b>5673</b>	70	8.0
<b>5783</b>	75	9.0

Code IP67	W	max m
<b>5784</b>	100	12.0
<b>5672</b>	150	18.0
<b>5676</b>	150	18.0
<b>5785</b>	240	28.5
<b>5786</b>	320	38.0

calcolo eseguito con tolleranza assorbimento +20% - calculation with an electrical absorption tolerance of +20%

Unità di gestione da ordinare separatamente — *Control units to be ordered separately* - Unités de gestion à commander séparément — *Steuergeräte separat zu bestellen*

Code	Descrizione	Description
<b>5862</b>	Dimmer PUSH/DIM 0/1-10V	<i>Dimmer PUSH/DIM/1-10V</i>
<b>5856</b>	Dimmer PWM PUSH/DIM 0/1-10V	<i>Dimmer PWM PUSH/DIM/1-10V</i>
<b>5834/B</b>	Centralina Bluetooth RGB-RGBW-Tunable White-Dimming	<i>RGB-RGBW-Tunable White-Dimming Bluetooth control unit</i>
<b>186155/DIMMER</b>	Dimmer 1-10V monocolor	<i>Dimmer 1-10V mono-colour</i>
<b>5854</b>	Dimmer DALI monocolor	<i>DALI mono-colour dimmer</i>
<b>5950/TW</b>	Centralina di controllo Tunable White e Dimming	<i>Tunable White and Dimming control unit</i>
<b>5951/C</b>	Telecomando a 4 zone per centralina 5950/TW	<i>Remote controller 4 zones for 5950/TW control unit</i>
<b>5952/T</b>	Pannello Touch da parete a 4 zone per centralina 5950/TW	<i>Wall touch panel 4 zones for 5950/TW control unit</i>
<b>5960/U</b>	Centralina Wi-Fi RGB-RGBW-Tunable White-Dimming	<i>RGB-RGBW-Tunable White-Dimming Wi-Fi control unit</i>
<b>5961/G</b>	Gateway Wi-Fi per centralina 5940/U e 5950/TW	<i>Gateway Wi-Fi for 5940/U and 5950/TW control unit</i>
<b>5811</b>	Controller DMX a 3 canali	<i>3 channels DMX controller</i>
<b>5812</b>	Amplificatore di segnale a 3 canali	<i>3 channels signal amplifier</i>
<b>5921/S</b>	Amplificatore di segnale a 5 canali	<i>5 channels signal amplifier</i>

Gestione della luce / *Light management*, see [cat.42](#)

Profili in alluminio compatibili - *Suitable aluminium profiles available* - Profils en aluminium appropriés disponibles - *Geeignete Aluminiumprofile erhältlich*

Code	Code	Code
<b>BARRA/STRIP/3</b> ✓	<b>BARRA/STRIP/12</b> ✓	<b>PA/01</b> ✓
<b>BARRA/STRIP/3E</b> ✓	<b>BARRA/STRIP/16</b> ✓	<b>PA/02/S</b> ✓
<b>BARRA/STRIP/4</b> ✓	<b>BARRA/STRIP/17</b> ✓	<b>PA/03</b> ✓
<b>BARRA/STRIP/5</b> ✓	<b>BARRA/STRIP/18</b> ✓	<b>PA/04</b> ✓
<b>BARRA/STRIP/6</b> ✓	<b>BARRA/STRIP/19</b> ✓	<b>PA/05</b> ✓
<b>BARRA/STRIP/8</b> ✓	<b>BARRA/STRIP/22</b> ✓	<b>PA/06</b> ✓
<b>BARRA/STRIP/9</b> ✓	<b>BARRA/STRIP/23</b> ✓	<b>PA/07</b> ✓
<b>BARRA/STRIP/10</b> ✓	<b>BARRA/STRIP/24</b> ✓	<b>PA/08</b> ✓
<b>BARRA/STRIP/11</b> ✓		

Profili in alluminio idonei per un'adeguata dissipazione, da ordinare separatamente.

*Aluminium profiles suggested for a suitable heat dissipation, to be ordered separately.*

*Profils en aluminium pour une correcte dissipation à commander séparément.*

*Aluminiumprofile zur korrekten Ableitung sind separat zu bestellen.*

Kit emergenza disponibile su richiesta — *Emergency kit available upon request* - Kit éclairage secouru disponible sur demande - *Notfall Kit auf Anfrage erhältlich*

Code	Descrizione	Description	Description	Beschreibung
<b>KIT EM/LED/1H</b>	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	<i>Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah</i>	Kit éclairage secouru pour LED 1 heure - Batt.7.2V - 1.5Ah	<i>Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah</i>
<b>KIT EM/LED/3H</b>	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	<i>Emergency kit for LED 3 hours - Batt.7.2V - 4Ah</i>	Kit éclairage secouru pour LED 3 heures - Batt.7.2V - 4Ah	<i>Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah</i>