

SFERALED OPALE



Logistic Data

Code	21294
Product	SFERALED OPALE
Box quantity (pcs.)	10/60
EAN Box	8012878212944
Gross weight of box in kg	1.38
Weight of single lamp in kg	0.023
Length of box in m	0.048
Width of box in m	0.048
Height of box in m	0.095
ETIM class name	LED lamp
Beam angle	360°
Brand of LED	EPISTAR
Power Factor	>0.5

Electrical Parameters

Lamp nominal wattage	4W
Rated wattage	4W
Nominal current (mA)	40 mA
Energy Consumption kWh/1000h	4


Light Application Parameters

Luminous flux	420 lm
Luminous efficiency of lamp	105 lm/W
Colour temperature	2700K
Colour rendering index Ra	>80
LLMF at the end of nominal life	70%
SDCM	6
Imax(cd)	
Switching cycles	100,000


Specification

dimnable	No
Energylabel from 2013	A++
Suitable for indoors	Yes
Application	general
Base	E27
Lamp shape	G45

Colour Temperature consistency (SDCM according to Mac Adam's ellipse)

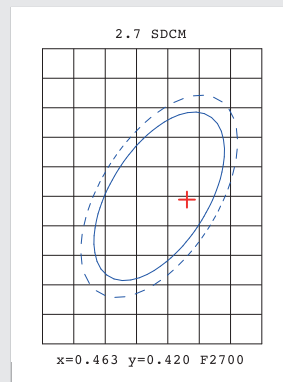

Peak of light intensity (max. cd)

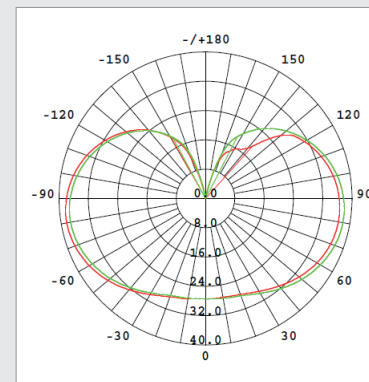

Spectral distribution of the lamp (range 180-800nm)

