


**BIADESIVO 3M
3M DOUBLE-SIDETAPE**



Striscia LED a 230V da 5, 20 e 50 metri.
Fino a 50m di striscia LED alimentata direttamente a 230V (NO DRIVER).

LED 2835, montato su nastro flessibile 3M con guaina protettiva in silicone.

Lifetime 50.000h (rendimento 70%).

È possibile tagliare o piegare il nastro ogni 100mm.

Profili in alluminio da ordinare separatamente.

Fusibile di protezione contro le sovratensioni, integrato nel circuito. E' possibile ripristinare il fusibile con accessorio cod. KIT/LS04/TAPPI da ordinare separatamente.

5m roll:
Accessori inclusi: n.2 tappi (1 con foro, 1 di chiusura)+ fusibile + n.10 clip di fissaggio + n.20 viti + 30cm cavo di alimentazione.

70230 5m roll

Code	Nominal lm/m	Real lm/m	W/m	CCT	LED/m
70230/C/05	1880	1552	18	3000K	140
70230/N/05	2045	1690	18	4000K	140

70230 20m roll

Code	Nominal lm/m	Real lm/m	W/m	CCT	LED/m
70230/C/20	1880	1552	18	3000K	140
70230/N/20	2045	1690	18	4000K	140

70230 50m roll

Code	Nominal lm/m	Real lm/m	W/m	CCT	LED/m
70230/C/50	1880	1552	18	3000K	140
70230/N/50	2045	1690	18	4000K	140

20m/50m roll
Kit clip e kit tappi non inclusi / *Kit clips and end caps not included*

Flexible LED strip 230V of 5, 20 and 50 metres.
Up to 50m of LED strip direct 230V supply (without driver).

2835 LED, coated with a silicone sheath. Assembled on flexible 3M sticky tape.



Lifetime 50.000h (70% lumen maintenance).

Possible flexible and cut points every 100mm.

Aluminium profiles to be ordered separately.

Integrated protection fuse against over-tension. Possibility to restore the fuse and order it as separate accessory code KIT/LS04/TAPPI.

5m roll:
Included accessories: n.2 end caps (1 with hole, 1 end cap) + fuse + n.10 fixing clips + n.20 screws + 30cm supply cable.

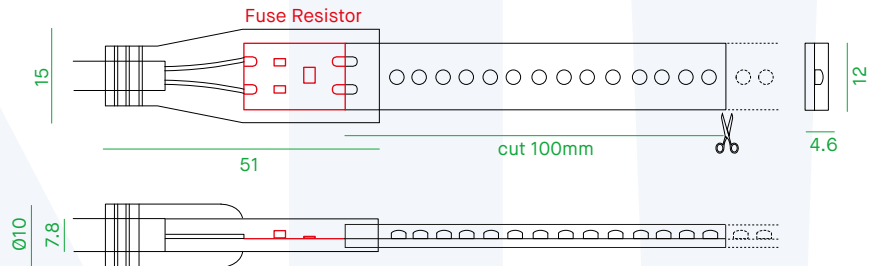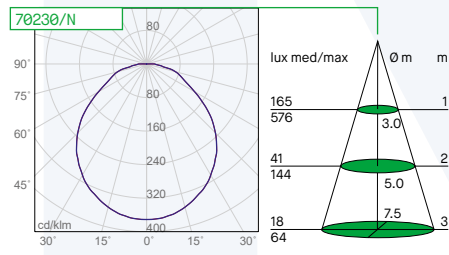

Accessori da ordinare separatamente – Accessories to be ordered separately

Code	Descrizione	Description
KIT/LS01/CLIP	Kit composto da n. 10 clip di fissaggio + 20 viti	Kit with n.10 fixing clips + n.20 screws
KIT/LS04/TAPPI	Kit composto da n.2 tappi (1 con foro, 1 di chiusura) + fusibile + 30cm cavo di alimentazione	Kit with n.2 end caps (1 with hole, 1 end cap) + fuse + 30cm supply cable.
SIL/TUBE	Sigillante siliconico acetico trasparente a norme FDA e MIL, UV resistant	Transparent acetic silicone seal according to FDA and MIL standards, UV resistant

Profili in alluminio compatibili - Suitable aluminium profiles available

Code	Code	Code	Code	Code
BARRA/STRIP/10	BARRA/STRIP/11	BARRA/STRIP/12	BARRA/STRIP/16	BARRA/STRIP/17

Profili in alluminio ideati per un'adeguata dissipazione, da ordinare separatamente / *Aluminium profiles suggested for a suitable heat dissipation, to be ordered separately.*