



BIADESIVO 3M
3M DOUBLE-SIDE TAPE



70052

Code	Nominal lm/m	Real lm/m	W/m	CCT	LED/m
70052/2700K	1264	945	7	2700K	140
70052/C	1330	994	7	3000K	140
70052/N	1490	1113	7	4000K	140
70052/F	1490	1113	7	6000K	140

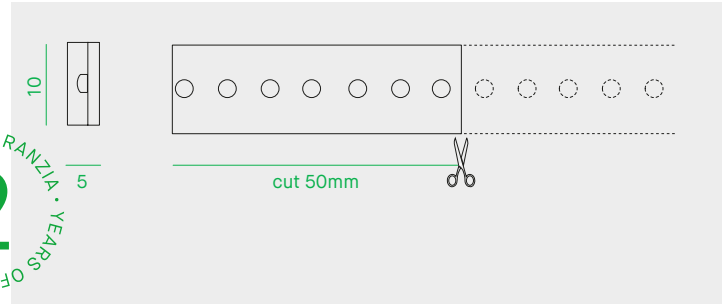

Striscia LED da esterno di 5 metri.

LED strip for outdoor use of 5m.

Bandeau LED pour l'extérieur de 5 mètres.

LED Lichtband für aussen von 5 Meter.

LED 2835, montato su nastro flessibile 3M con guaina protettiva in silicone.

2835 LED, coated with a silicone sheath. Assembled on flexible 3M sticky tape.

LED 2835, réalisé sur circuit flexible 3M revêtu d'une couche de silicone.

LED 2835, auf einem flexiblen 3M Band montiert mit Schutzhülle aus Silikon.

Life time 30.000h (rendimento 70%).

Life time 30.000h (70% lumen maintenance).

Durée de vie 30.000h (rendement 70%).

Lebensdauer 30.000h (Lichtstrom 70%).

È possibile tagliare o piegare il nastro ogni 50mm (7 LED). Lunghezza massima consentita del nastro è 5 metri.

Possible flexible and cut points every 50mm (7 LEDs). Maximum length allowed for the tape is 5m.

Le bandeau peut être coupé ou plié tous les 50mm (7 LEDs). Longueur maximum pour le circuit flexible 5 mètres.

Alle 50mm (7 LED) schneid- oder biegsam. Maximal zulässige Länge des Bandes beträgt 5 Meter.

Nella confezione sono inclusi il kit di fissaggio e il kit per ripristinare il grado di protezione IP67.

Fixing kit and IP67 kit included.

Inclus kit de fixation et kit pour rétablir la protection IP67.

Befestigungs-Kit und wiederherstellbarer Schutz-Kit sind enthalten.

Profili in alluminio da ordinare separatamente.

Aluminium profiles to be ordered separately.

Profils en aluminium à commander séparément.

Aluminiumprofile separat zu bestellen.

Il collegamento di più strisce LED ad un solo alimentatore va effettuato in parallelo.

In case more LED strips have to be connected to one power supply, connect them in parallel.

Il est possible de brancher en parallèle plusieurs bandeaux sur la même alimentation.

Mehrere LED-Lichtbänder sollten parallelgeschaltet werden.

Alimentatori da ordinare separatamente — Power supplies to be ordered separately - Unités d'alimentation à commander séparément — Netzgerät separat zu bestellen

Code IP20	W	max m
5855	20	2.5
5674	70	8.0
5678	75	9.0
5677	120	14.0
5675	150	18.0

Code IP20	W	max m
5801 (PUSH/DIM1-10V)	100	12.0
5802/T (PUSH/DALI)	100	12.0

Code IP67	W	max m
5788	25	3.0
5789	40	4.5
5782	60	7.0
5673	70	8.0
5783	75	9.0

Code IP67	W	max m
5784	100	12.0
5672	150	18.0
5676	150	18.0
5785	240	28.5
5786	320	38.0

calcolo eseguito con tolleranza assorbimento +20% - calculation with an electrical absorption tolerance of +20%

Unità di gestione da ordinare separatamente — *Control units to be ordered separately* - Unités de gestion à commander séparément — *Steuergeräte separat zu bestellen*

Code	Descrizione	Description
5862	Dimmer PUSH/DIM 0/1-10V	<i>Dimmer PUSH/DIM/1-10V</i>
5856	Dimmer PWM PUSH/DIM 0/1-10V	<i>Dimmer PWM PUSH/DIM/1-10V</i>
5834/B	Centralina Bluetooth RGB-RGBW-Tunable White-Dimming	<i>RGB-RGBW-Tunable White-Dimming Bluetooth control unit</i>
186155/DIMMER	Dimmer 1-10V monocolor	<i>Dimmer 1-10V mono-colour</i>
5854	Dimmer DALI monocolor	<i>DALI mono-colour dimmer</i>
5950/TW	Centralina di controllo Tunable White e Dimming	<i>Tunable White and Dimming control unit</i>
5951/C	Telecomando a 4 zone per centralina 5950/TW	<i>Remote controller 4 zones for 5950/TW control unit</i>
5952/T	Pannello Touch da parete a 4 zone per centralina 5950/TW	<i>Wall touch panel 4 zones for 5950/TW control unit</i>
5960/U	Centralina Wi-Fi RGB-RGBW-Tunable White-Dimming	<i>RGB-RGBW-Tunable White-Dimming Wi-Fi control unit</i>
5961/G	Gateway Wi-Fi per centralina 5940/U e 5950/TW	<i>Gateway Wi-Fi for 5940/U and 5950/TW control unit</i>
5811	Controller DMX a 3 canali	<i>3 channels DMX controller</i>
5812	Amplificatore di segnale a 3 canali	<i>3 channels signal amplifier</i>
5921/S	Amplificatore di segnale a 5 canali	<i>5 channels signal amplifier</i>

Gestione della luce / *Light management, see [cat.42](#)*

Profili in alluminio compatibili - *Suitable aluminium profiles available* - Profils en aluminium appropriés disponibles - *Geeignete Aluminiumprofile erhältlich*

Code		Code		Code	
BARRA/STRIP/3	✓	BARRA/STRIP/12	✓	PA/01	✓
BARRA/STRIP/3E	✓	BARRA/STRIP/16	✓	PA/02/S	✓
BARRA/STRIP/4	✓	BARRA/STRIP/17	✓	PA/03	✓
BARRA/STRIP/5	✓	BARRA/STRIP/18	✗	PA/04	✓
BARRA/STRIP/6	✓	BARRA/STRIP/19	✓	PA/05	✓
BARRA/STRIP/8	✗	BARRA/STRIP/22	✗	PA/06	✓
BARRA/STRIP/9	✓	BARRA/STRIP/23	✗	PA/07	✓
BARRA/STRIP/10	✓	BARRA/STRIP/24	✓	PA/08	✗
BARRA/STRIP/11	✓				

Profili in alluminio idonei per un'adeguata dissipazione, da ordinare separatamente.
Aluminium profiles suggested for a suitable heat dissipation, to be ordered separately.
Profils en aluminium pour une correcte dissipation à commander séparément.
Aluminiumprofile zur korrekten Ableitung sind separat zu bestellen.

Kit emergenza disponibile su richiesta — *Emergency kit available upon request* - Kit éclairage secouru disponible sur demande - *Notfall Kit auf Anfrage erhältlich*

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	<i>Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah</i>	Kit éclairage secouru pour LED 1 heure - Batt.7.2V - 1.5Ah	<i>Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah</i>
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	<i>Emergency kit for LED 3 hours - Batt.7.2V - 4Ah</i>	Kit éclairage secouru pour LED 3 heures - Batt.7.2V - 4Ah	<i>Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah</i>