





”Waterproof“ for encapsulation



WP 0404 G

- 1.5-4 mm², Cu 3~







- with terminals
- 5-pole per pole 8 x 1,5 mm² sol / f, 6 x 2,5 mm² sol / f, 4 x 4 mm² sol / f, 2 x 6 mm² sol / f
- cable entries via knockouts, order AKM separately (see cable entry systems LES)
- cable junction box for encapsulating
- for ground installation without live loads or in risk of condensation formation and ingress of liquids
- installation under water without chemical additives up to a depth of 1 meter possible in the long term
- usable for heating cable / heating tape up to max. 70 °C surface temperature
- with sealing compound and sealing plug
- In case of re-installation or testing the sealing compound can be removed easily
- durability of sealing compound to processing ≥ 12 months at a storage temperature of 5 - 50 °C
- External brackets for wall fixing included
- enclosure volume 500 ml
- Colour: grey, RAL 7035


degree of protection:	IP 68 submersion up to 20 meter, 168 hours
rated insulation voltage	U _i = 690 V a.c./d.c.
rated current:	32 A
tightening torque for terminal	0.7 Nm
material	PC-GFS (polycarbonate)
width	104 mm
height	104 mm
depth	70 mm
weight	0,778 kg
in accordance with	DIN VDE V 0606-22-100

Drawings

Dimension drawing

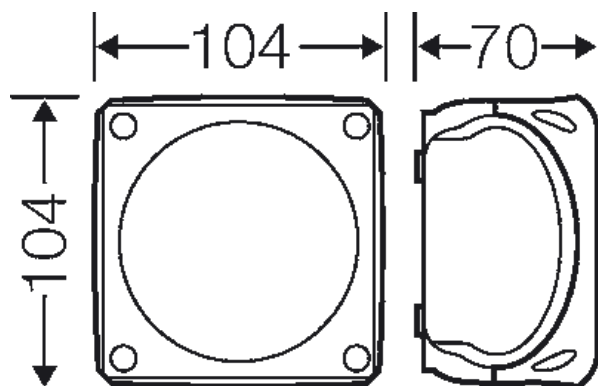




”Waterproof“ for encapsulation




WP 0404 G

- 1.5-4 mm², Cu 3~







Detail mass

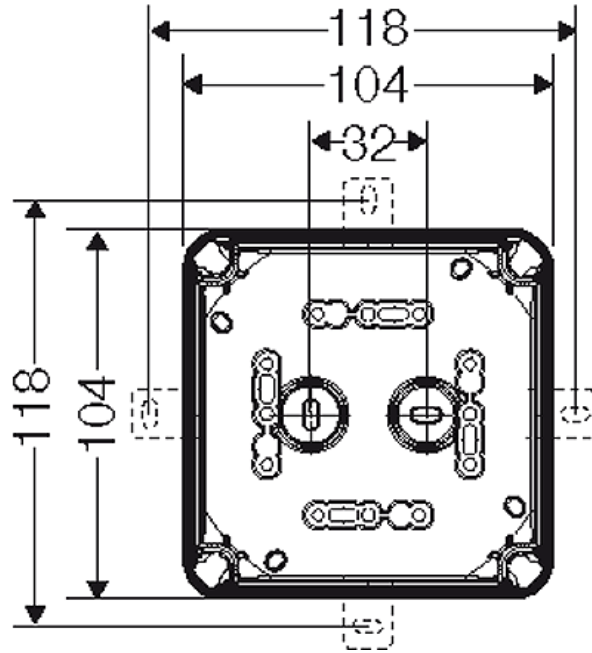





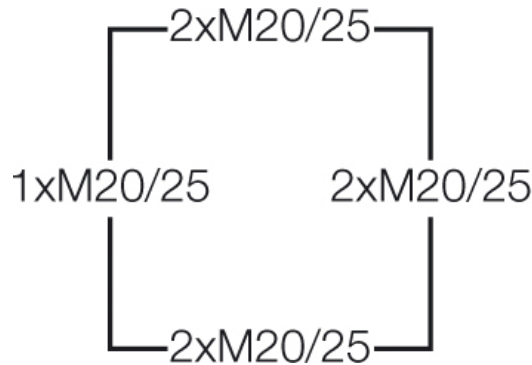Box walls



Operating and ambient conditions

Application area	Suitable for outdoor installation (harsh environment and/or outdoor). For application in ambient conditions with formation of condensation and ingress of water as well as for installation in the ground without traffic loads in accordance with DIN VDE V 0606-22-100
Resistant to occasional cleaning procedures (direct jet)	Resistant to occasional cleaning procedures (direct jet) with high-pressure cleaner without additives, water temperature: max. 80° C
Ambient temperature	Average value over 24 hours + 55 °C Maximum value + 70 °C Minimum value - 25 °C
Relative humidity	100 %
Burning behaviour	Glow wire test IEC 60695-2-11: 960 °C UL Subject 94: V-0 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK09 (10 Joule)

”Waterproof“ for encapsulation

	<p>WP 0404 G</p> <ul style="list-style-type: none">• 1.5-4 mm², Cu 3~		
			

Toxic behaviour

halogen-free
silicone-free
isocyanate-free