




### M1SA/C

Code	Nominal lumen	W	CCT	Beam
M1SA/CM/3K13/X	1100	13	3000K	20°
M1SA/CM/4K13/X	1200	13	4000K	20°
M1SA/CF/3K13/X	1100	13	3000K	40°
M1SA/CF/4K13/X	1200	13	4000K	40°
M1SA/CM/3K18/X	1500	18	3000K	20°
M1SA/CM/4K18/X	1600	18	4000K	20°
M1SA/CF/3K18/X	1500	18	3000K	40°
M1SA/CF/4K18/X	1600	18	4000K	40°



Incasso orientabile quadrato a LED per installazione a soffitto.

Square adjustable recessed LED fitting for false ceiling installation.

Appareil à encastrer LED orientable carré pour installation dans faux-plafond

Quadratischer LED-Einbau für Deckeninstallation in 3 Massen.

LED COB CITIZEN CRI 90 (range potenza: 13W-18W).

CITIZEN COB LED CRI 90 (power range: 13W-18W).

LED COB CITIZEN IRC 90 (gamme puissances: 13W-18W).

LED COB CITIZEN CRI 90 (Leistungsbereich: 13W-18W).

Life time 50.000h (rendimento 70%).

Life time 50.000h (70% lumen maintenance).

Durée de vie 50.000h (rendement 70%).

Lebensdauer 50.000h (Lichtstrom 70%).

Corpo in alluminio pressofuso. Modulo LED IP54.

Body in die-cast aluminium. LED Module IP54.

Corps en fonderie d'aluminium. Module LED IP54.

Aluminium-Druckguss Körper. LED-Modul IP54.

Cornice in alluminio verniciato bianco con staffe di fissaggio regolabili per soffitti di spessore diverso.

Frame in white painted aluminium with adjustable fixing brackets adjustable to different depth of ceiling.

Cadre en aluminium peint blanc avec patentes de fixation réglables pour différentes épaisseurs de plafond.

Weiss lackierter Aluminium Rahmen mit einstellbaren Klammern für verschiedene Deckendichte.

Doppio sistema ottico con lente e riflettore che migliora il comfort visivo. UGR<19 o UGR<16 a seconda del modello.

Double optical system with lens and reflector to improve the visual comfort. UGR<19 or UGR<16 depending on model.

Double système optique avec lentille et réflecteur pour un meilleur confort visuel. UGR<19 o UGR<16 Selon le modèle.

Dual-optisches System mit einer Linse und Reflektor die den Sehkomfort verbessern. UGR<19 o UGR<16 Gemäss Modell.

Disponibili accessori intercambiabili:  
- cornice trimless per soffitti di spessore 12,5-25 mm;  
- riflettore in policarbonato in cinque finiture diverse;  
- griglia anti abbagliamento.

Interchangeable accessories available upon request:  
- trimless frame for ceiling of depth 12,5-25mm;  
- polycarbonate reflector in 5 different finishing;  
- anti-glare grid.

Disponibles accessoires interchangeables:  
- anneau trimless pour plafond d'épaisseur 12,5-25 mm;  
- réflecteur en polycarbonate en cinq finitions différentes;  
- grille anti éblouissement.





Austauschbare Zubehör erhältlich:  
- Rahmen Trimless für 12,5-25 mm Deckendichte;  
- Polycarbonat Reflektor in fünf verschiedenen Ausführungen;  
- Entblendungs Gitter.

Alimentatore 220-240V - 50/60Hz incluso. (ON-OFF, PUSH/DIM 1-10V, DALI)


220-240V - 50/60Hz power supply included. (ON-OFF, PUSH/DIM 1-10V, DALI)

Alimentation 220-240V - 50/60Hz incluse. (ON-OFF, PUSH/DIM 1-10V, DALI)

Netzgerät 220-240V - 50 / 60Hz enthalten. (ON-OFF, PUSH/DIM 1-10V, DALI)

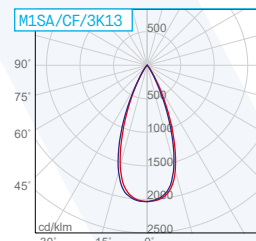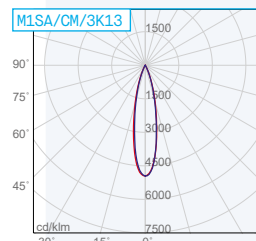

Nero-Black-Noir-Schwarz

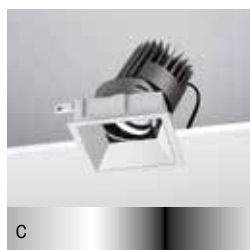

Cromo-Chrome-Chrome-Chrom



Oro-Gold-Or-GoId



Argento opaco-Silver matt  
Argent mat-Silber




Bianco-White-Blanc-Weiss



### M1SA/T

Code	Nominal lumen	W	CCT	Beam
M1SA/TM/3K13/X	1100	13	3000K	20°
M1SA/TM/4K13/X	1200	13	4000K	20°
M1SA/TF/3K13/X	1100	13	3000K	40°
M1SA/TF/4K13/X	1200	13	4000K	40°
M1SA/TM/3K18/X	1500	18	3000K	20°
M1SA/TM/4K18/X	1600	18	4000K	20°
M1SA/TF/3K18/X	1500	18	3000K	40°
M1SA/TF/4K18/X	1600	18	4000K	40°



Incastro orientabile quadrato a LED per installazione a soffitto.

Square adjustable recessed LED fitting for false ceiling installation.

Appareil à encastrer LED orientable carré pour installation dans faux-plafond

Quadratischer LED-Einbau für Deckeninstallation in 3 Massen.

LED COB CITIZEN CRI 90 (range potenza: 13W-18W).

CITIZEN COB LED CRI 90 (power range: 13W-18W).

LED COB CITIZEN IRC 90 (gamme puissances: 13W-18W).

LED COB CITIZEN CRI 90 (Leistungsbereich: 13W-18W).

Life time 50.000h (rendimento 70%).

Life time 50.000h (70% lumen maintenance).

Durée de vie 50.000h (rendement 70%).

Lebensdauer 50.000h (Lichtstrom 70%).

Corpo in alluminio pressofuso. Modulo LED IP54.

Body in die-cast aluminium. LED Module IP54.

Corps en fonderie d'aluminium. Module LED IP54.

Aluminium-Druckguss Körper. LED-Modul IP54.

Cornice in alluminio verniciato bianco con staffe di fissaggio regolabili per soffitti di spessore diverso.

Frame in white painted aluminium with adjustable fixing brackets adjustable to different depth of ceiling.

Cadre en aluminium peint blanc avec patentes de fixation réglables pour différentes épaisseurs de plafond.

Weiss lackierter Aluminium Rahmen mit einstellbaren Klammern für verschiedene Deckendichte.

Doppio sistema ottico con lente e riflettore che migliora il comfort visivo. UGR<19 o UGR<16 a seconda del modello.

Double optical system with lens and reflector to improve the visual comfort. UGR<19 or UGR<16 depending on model.

Double système optique avec lentille et réflecteur pour un meilleur confort visuel. UGR<19 o UGR<16 Selon le modèle.

Dual-optisches System mit einer Linse und Reflektor die den Sehkomfort verbessern. UGR<19 or UGR<16 Gemäss Modell.

Disponibili accessori intercambiabili:  
- cornice trimless per soffitti di spessore 12,5-25 mm;  
- riflettore in policarbonato in cinque finiture diverse;  
- griglia anti abbagliamento.

Interchangeable accessories available upon request:  
- trimless frame for ceiling of depth 12,5-25mm;  
- polycarbonate reflector in 5 different finishing;  
- anti-glare grid.

Disponibles accessoires interchangeables:  
- anneau trimless pour plafond d'épaisseur 12,5-25 mm;  
- réflecteur en polycarbonate en cinq finitions différentes;  
- grille anti éblouissement.




Austauschbare Zubehör erhältlich:  
- Rahmen Trimless für 12,5-25 mm Deckendichte;  
- Polycarbonat Reflektor in fünf verschiedenen Ausführungen;  
- Entblendungs Gitter.

Alimentatore 220-240V - 50/60Hz incluso. (ON-OFF, PUSH/DIM 1-10V, DALI)


220-240V - 50/60Hz power supply included. (ON-OFF, PUSH/DIM 1-10V, DALI)

Alimentation 220-240V - 50/60Hz incluse. (ON-OFF, PUSH/DIM 1-10V, DALI)

Netzgerät 220-240V - 50 / 60Hz enthalten. (ON-OFF, PUSH/DIM 1-10V, DALI)

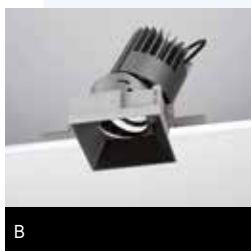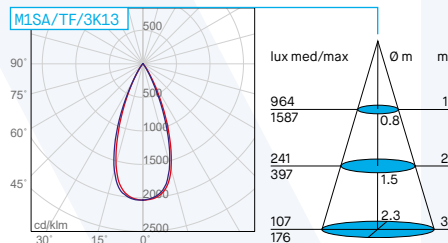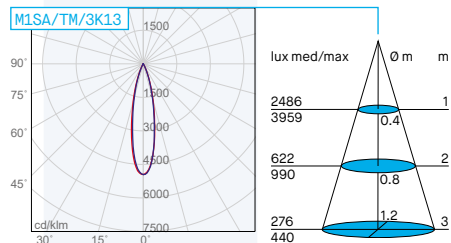

Nero-Black-Noir-Schwarz




Cromo-Chrome-Chrome-Chrom



Oro-Gold-Or-GoId



Argento opaco-Silver matt Argent mat-Silber

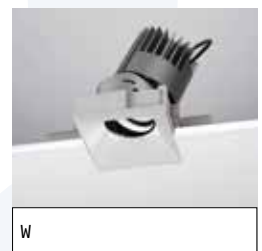

Bianco-White-Blanc-Weiss

Code	Descrizione	Description	Description	Beschreibung
M1SA/_/_/_/_/X1	Con driver ON-OFF Made in Italy	With Made in Italy ON-OFF driver	Avec alimentation ON-OFF Made in Italy	Mit Driver ON-OFF Made in Italy
M1SA/_/_/_/_/X2	Con driver PUSH/DIM 1-10V Made in Italy	With Made in Italy PUSH/DIM 1-10V driver	Avec alimentation PUSH/DIM 1-10V Made in Italy	Mit Driver PUSH/DIM 1-10V Made in Italy
M1SA/_/_/_/_/X3	Con driver DALI Made in Italy	With Made in Italy DALI driver	Avec alimentation DALI Made in Italy	Mit Driver DALI Made in Italy
M1SA/_/_/_/_/X6	Con driver ON-OFF	With ON-OFF driver	Avec alimentation ON-OFF	Mit Driver ON-OFF

Code	W	driver code		mA	Vac	Vdc	Power factor	Hz	Tc	Ta		
M1	13W	5835	ON-OFF	350mA	220-240V	32-42Vdc	0.9	50/60Hz	75°C	0...+50°C		
	18W	5836	ON-OFF	500mA		2-54Vdc						
	13W	5839	ON-OFF Made in Italy	350mA			2-40Vdc				0.97	
	18W			500mA								
	13W	5813	PUSH/DIM 1-10V	350mA		2-43Vdc	0.95					
	18W			500mA								
	13W	5814	DALI	350mA		2-43Vdc	0.92					
	18W			500mA								
											75°C	-25...+45°C

Riflettore in policarbonato incluso nel codice prodotto. Disponibile su richiesta - Polycarbonate reflector included in the product code but available upon request - Réflecteur en polycarbonate inclus dans le code du produit. Disponible sur demande - Polycarbonat Reflektor im Produkt Code enthalten. Auf Anfrage erhältlich.

X	Code	Descrizione	Description	Description	Beschreibung
B	M1SA/2RF/B	Riflettore orientabile quadro colore nero	Adjustable square reflector black colour	Réflecteur orientable carré noir	Quadratischer schwarzer Verstellbarer Reflektor
C	M1SA/2RF/C	Riflettore orientabile quadro cromo	Adjustable square reflector chrome	Réflecteur orientable carré chrome	Quadratischer chrom Verstellbarer Reflektor
G	M1SA/2RF/G	Riflettore orientabile quadro colore oro	Adjustable square reflector gold colour	Réflecteur orientable carré or	Quadratischer gold Verstellbarer Reflektor
M	M1SA/2RF/M	Riflettore orientabile quadro argento opaco	Adjustable square reflector silver matt	Réflecteur orientable carré argent mat	Quadratischer silber Verstellbarer Reflektor
W	M1SA/2RF/W	Riflettore orientabile quadro colore bianco	Adjustable square reflector white colour	Réflecteur orientable carré blanc	Quadratischer weisser Verstellbarer Reflektor

Accessori inclusi nel codice prodotto. Disponibili su richiesta - Accessories included in the product code. Available upon request Accessoires inclus dans le code du produit. Disponibles sur demande - Zubehör im Produktcode enthalten. Auf Anfrage erhältlich

Code	Descrizione	Description	Description	Beschreibung
M1S/FRAME	Cornice quadra	Square frame	Cadre carré	Quadratischer Rahmen
M1S/TRIMLESS	Senza cornice	Trimless	Trimless	Trimless

Accessori disponibili su richiesta - Available accessories that can be ordered separately - Accessoires disponibles sur demande - Zubehöre auf Anfrage erhältlich

Code	Descrizione	Description	Description	Beschreibung
M1/GRIGLIA	Griglia tonda	Round grid	Grille ronde	Rundes Raster

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secouru disponible sur demande - Notfall Kit auf Anfrage erhältlich

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secouru pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secouru pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah

Componi il codice prodotto sul nostro sito [www.nobile.it](http://www.nobile.it) con l'aiuto del configuratore  
 Our online configurator can help you to define product code: [nobile.it/modusconfigurator](http://nobile.it/modusconfigurator)  
 Définir le code produit sur notre site [www.nobile.it](http://www.nobile.it) avec l'aide du configurateur  
 Definieren Sie den Produktcode auf unserer Seite [www.nobile.it](http://www.nobile.it) mit Hilfe des Konfigurators: [nobile.it/modusconfigurator](http://nobile.it/modusconfigurator)