




### MORA/C

Code	Nominal lumen	W	CCT	Beam
MORA/CM/3K07/_	850	7,5	3000K	20°
MORA/CM/4K07/_	900	7,5	4000K	20°
MORA/CF/3K07/_	850	7,5	3000K	40°
MORA/CF/4K07/_	900	7,5	4000K	40°
MORA/CM/3K11/_	1100	11	3000K	20°
MORA/CM/4K11/_	1200	11	4000K	20°
MORA/CF/3K11/_	1100	11	3000K	40°
MORA/CF/4K11/_	1200	11	4000K	40°



Incasso orientabile tondo a LED per installazione a soffitto. *Round adjustable recessed LED fitting for false ceiling installation.* Appareil à encastrer LED orientable rond pour installation dans faux-plafond *Runder, LED-Einbau für Deckeninstallation in 3 Massen.*

LED COB CITIZEN CRI 90 (range potenza: 7.5W-11W). *CITIZEN COB LED CRI 90 (power range: 7.5W-11W).* LED COB CITIZEN IRC 90 (gamme puissances: 7.5W-11W). *LED COB CITIZEN CRI 90 (Leistungsbereich: 7.5W-11W).*

Life time 50.000h (rendimento 70%). *Life time 50.000h (70% lumen maintenance).* Durée de vie 50.000h (rendement 70%). *Lebensdauer 50.000h (Lichtstrom 70%).*



Corpo in alluminio pressofuso. Modulo LED IP54. *Body in die-cast aluminium. LED Module IP54.* Corps en fonderie d'aluminium. Module LED IP54. *Aluminium-Druckguss Körper. LED-Modul IP54.*

Cornice in alluminio verniciato bianco con staffe di fissaggio regolabili per soffitti di spessore diverso. *Frame in white painted aluminium with adjustable fixing brackets adjustable to different depth of ceiling.* Cadre en aluminium peint blanc avec pat-tes de fixation réglables pour différentes épaisseurs de plafond. *Weiss lackierter Aluminium Rahmen mit einstellbaren Klammern für verschiedene Deckendichte.*

Doppio sistema ottico con lente e riflettore che migliora il comfort visivo. UGR<16. *Double optical system with lens and reflector to improve the visual comfort. UGR<16.* Double système optique avec lentille et réflecteur pour un meilleur confort visuel. UGR<16. *Dual-optisches System mit einer Linse und Reflektor die den Sehkomfort verbessern. UGR<16.*

Disponibili accessori intercambiabili: - cornice trimless per soffitti di spessore 12,5-25 mm; - riflettore in policarbonato in cinque finiture diverse; - griglia anti abbagliamento. *Interchangeable accessories available upon request: - trimless frame for ceiling of depth 12,5-25mm; - polycarbonate reflector in 5 different finishing; - anti-glare grid.* Disponibles accessoires interchangeables: - anneau trimless pour plafond d'épaisseur 12,5-25 mm; - réflecteur en polycarbonate en cinq finitions différentes; - grille anti éblouissement. *Austauschbare Zubehör erhältlich: - Rahmen Trimless für 12,5-25 mm Deckendichte; - Polycarbonat Reflektor in fünf verschiedenen Ausführungen; - Entblendungs Gitter.*

Alimentatore 220-240V - 50/60Hz incluso. (ON-OFF, PUSH/DIM 1-10V, DALI) *220-240V - 50/60Hz power supply included. (ON-OFF, PUSH/DIM 1-10V, DALI)* Alimentation 220-240V - 50/60Hz incluse. (ON-OFF, PUSH/DIM 1-10V, DALI) *Netzgerät 220-240V - 50 / 60Hz enthalten. (ON-OFF, PUSH/DIM 1-10V, DALI)*

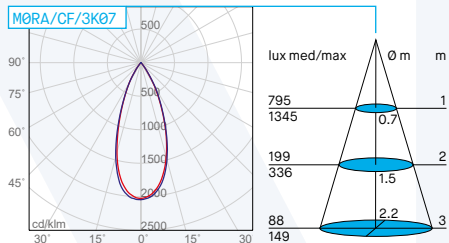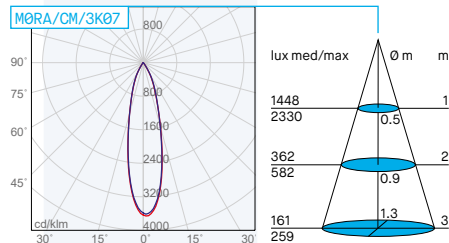

Nero-Black-Noir-Schwarz



Cromo-Chrome-Chrome-Chrom



Oro-Gold-Or-Gold




Argento opaco-Silver matt  
Argent mat-Silber



Bianco-White-Blanc-Weiss



Code	Descrizione	Description	Description	Beschreibung
MORA/_/_/_/_/1	Con driver ON-OFF Made in Italy	With Made in Italy ON-OFF driver	Avec alimentation ON-OFF Made in Italy	Mit Driver ON-OFF Made in Italy
MORA/_/_/_/_/2	Con driver PUSH/DIM 1-10V Made in Italy	With Made in Italy PUSH/DIM 1-10V driver	Avec alimentation PUSH/DIM 1-10V Made in Italy	Mit Driver PUSH/DIM 1-10V Made in Italy
MORA/_/_/_/_/3	Con driver DALI Made in Italy	With Made in Italy DALI driver	Avec alimentation DALI Made in Italy	Mit Driver DALI Made in Italy

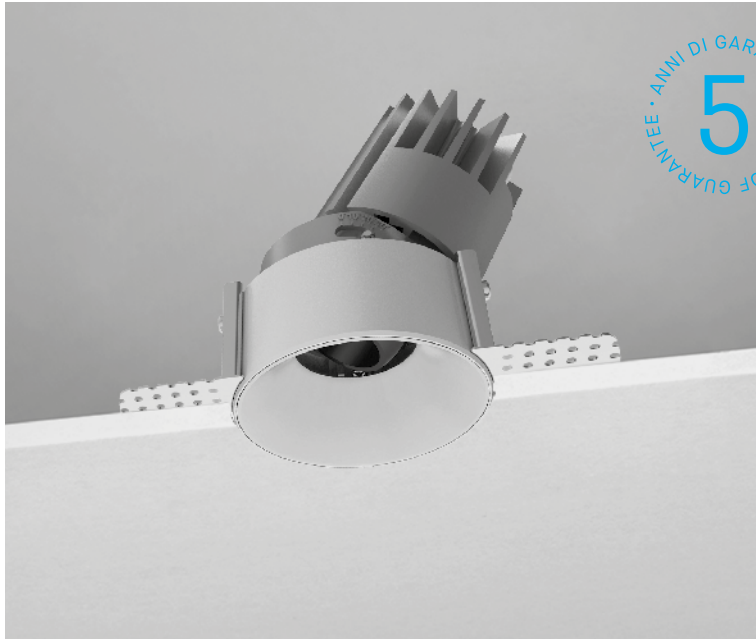

5 ANNI DI GARANZIA  
5 YEARS OF GUARANTEE

**MORA/T**

Code	Nominal lumen	W	CCT	Beam
MORA/TM/3K07/_	850	7,5	3000K	20°
MORA/TM/4K07/_	900	7,5	4000K	20°
MORA/TF/3K07/_	850	7,5	3000K	40°
MORA/TF/4K07/_	900	7,5	4000K	40°
MORA/TM/3K11/_	1100	11	3000K	20°
MORA/TM/4K11/_	1200	11	4000K	20°
MORA/TF/3K11/_	1100	11	3000K	40°
MORA/TF/4K11/_	1200	11	4000K	40°



CRI 90	68mm	M	F	DRIVER INCLUDED	UGR <16	GRF 1	IP20	IP54 Module	CE	F		A++	A+	A
--------	------	---	---	-----------------	---------	-------	------	-------------	----	---	--	-----	----	---

Incasso orientabile tondo a LED per installazione a soffitto.

Round adjustable recessed LED fitting for false ceiling installation.

Appareil à encastrer LED orientable rond pour installation dans faux-plafond

Runder, LED-Einbau für Deckeninstallation in 3 Massen.

LED COB CITIZEN CRI 90 (range potenza: 7.5W-11W).

CITIZEN COB LED CRI 90 (power range: 7.5W-11W).

LED COB CITIZEN IRC 90 (gamme puissances: 7.5W-11W).

LED COB CITIZEN CRI 90 (Leistungsbereich: 7.5W-11W).

Life time 50.000h (rendimento 70%).

Life time 50.000h (70% lumen maintenance).

Durée de vie 50.000h (rendement 70%).

Lebensdauer 50.000h (Lichtstrom 70%).

Corpo in alluminio pressofuso. Modulo LED IP54.

Body in die-cast aluminium. LED Module IP54.

Corps en fonderie d'aluminium. Module LED IP54.

Aluminium-Druckguss Körper. LED-Modul IP54.

Cornice in alluminio verniciato bianco con staffe di fissaggio regolabili per soffitti di spessore diverso.

Frame in white painted aluminium with adjustable fixing brackets adjustable to different depth of ceiling.

Cadre en aluminium peint blanc avec pat-tes de fixation réglables pour différentes épaisseurs de plafond.

Weiss lackierter Aluminium Rahmen mit einstellbaren Klammern für verschiedene Deckendichte.

Doppio sistema ottico con lente e riflettore che migliora il comfort visivo. UGR<19 o UGR<16 a seconda del modello.

Double optical system with lens and reflector to improve the visual comfort. UGR<19 or UGR<16 depending on model.

Double système optique avec lentille et réflecteur pour un meilleur confort visuel. UGR<19 o UGR<16 Selon le modèle.

Dual-optisches System mit einer Linse und Reflektor die den Sehkomfort verbessern. UGR<19 or UGR<16 Gemäss Modell.

Disponibili accessori intercambiabili: - cornice trimless per soffitti di spessore 12,5-25 mm; - riflettore in policarbonato in cinque finiture diverse; - griglia anti abbagliamento.

Interchangeable accessories available upon request: - trimless frame for ceiling of depth 12,5-25mm; - polycarbonate reflector in 5 different finishing; - anti-glare grid.

Disponibles accessoires interchangeables: - anneau trimless pour plafond d'épaisseur 12,5-25 mm; - réflecteur en polycarbonate en cinq finitions différentes; - grille anti éblouissement.



Austauschbare Zubehöre erhältlich: - Rahmen Trimless für 12,5-25 mm Deckendichte; - Polycarbonat Reflektor in fünf verschiedenen Ausführungen; - Entblendungs Gitter.

Alimentatore 220-240V - 50/60Hz incluso. (ON-OFF, PUSH/DIM 1-10V, DALI)

220-240V - 50/60Hz power supply included. (ON-OFF, PUSH/DIM 1-10V, DALI)

Alimentation 220-240V - 50/60Hz incluse. (ON-OFF, PUSH/DIM 1-10V, DALI)

Netzgerät 220-240V - 50 / 60Hz enthalten. (ON-OFF, PUSH/DIM 1-10V, DALI)

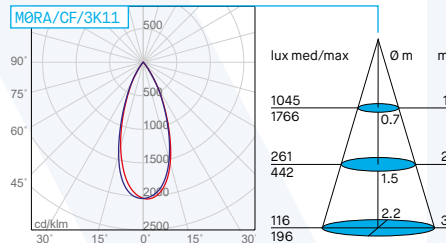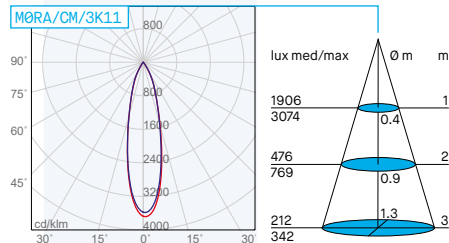

Nero-Black-Noir-Schwarz



Cromo-Chrome-Chrome-Chrom



Oro-Gold-Or-Gold



Argento opaco-Silver matt  
Argent mat-Silber



Bianco-White-Blanc-Weiss

Code	Descrizione	Description	Description	Beschreibung
MORA/_/_/_/_/1	Con driver ON-OFF Made in Italy	With Made in Italy ON-OFF driver	Avec alimentation ON-OFF Made in Italy	Mit Driver ON-OFF Made in Italy
MORA/_/_/_/_/2	Con driver PUSH/DIM 1-10V Made in Italy	With Made in Italy PUSH/DIM 1-10V driver	Avec alimentation PUSH/DIM 1-10V Made in Italy	Mit Driver PUSH/DIM 1-10V Made in Italy
MORA/_/_/_/_/3	Con driver DALI Made in Italy	With Made in Italy DALI driver	Avec alimentation DALI Made in Italy	Mit Driver DALI Made in Italy