


## STANDARD STANDARD

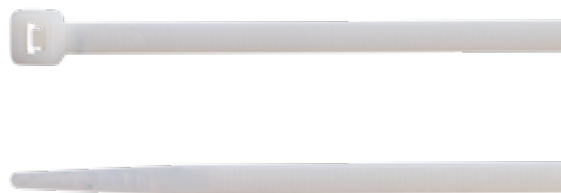

**MATERIALE:** Poliammide (PA 6.6)

**COLORE:** naturale

**LIVELLO DI AUTOESTINGUENZA:**

UL 94 - V2

**TEMP. D'ESERCIZIO:** da -40 °C a +85 °C

**TEMP. MIN. D'INSTALLAZIONE:** -10°C

**RESISTENZA AGLI AGENTI CHIMICI:**

Buona resistenza alle basi, agli olii, ai grassi, ai solventi di cloruro. Limitata resistenza agli acidi. Non resistente ai fenoli.

**NORME DI RIF.:** EN 62275:2015-02

**CLASSIFICAZIONE:**

Tipo 1 (EN), Tipo 21 (UL)

**MATERIAL:** Polyamide (PA 6.6)

**COLOR:** natural

**SELF-EXTINGUISHING GRADE:**

UL 94 - V2

**OPERATING TEMP.:** from -40 °C to +85 °C

**MIN. INSTALLATION TEMP.:** -10°C

**CHEMICAL RESISTANCE:** Good resistance

to bases, oils, grease, chloride solvents.

Limited resistance to acids.

Not resistant to phenols.

**ACCORDING TO STD.:** EN 62275:2015-02

**CLASSIFICATION:**

Type 1 (EN), Type 21 (UL)

Articolo Code	Dimensioni mm Dimensions mm		Ø Max di serraggio Max bundle Ø	Resistenza minima Minimum resistance			
	Larghezza Width	Lunghezza Length				Ø mm	Trazione N Tensile N strength
<b>B0824</b>	2,5	80	14	80	100/8000		
<b>B1025</b>		100	20,5		100/5000*		
<b>B1225</b>		120	27		100/5000*		
<b>B1625</b>		160	40		100/4000*		
<b>B2025</b>		200	52,5		100/3000*		
<b>B1436</b>	3,6	140	33	180	100/2500*		
<b>B2036</b>		200	52,5		100/2000*		
<b>B2936</b>		300	106		100/1500*		
<b>B3736</b>	4,6	370	105	220	100/4000		
<b>B1248</b>		120	24		100/2000		
<b>B1648</b>		160	36		100/1500*		
<b>B1948</b>		188	46		100/1500*		
<b>B2048</b>		200	50		100/1500*		
<b>B2548</b>		250	65		100/1300*		
<b>B3048</b>		300	81		100/1000*		
<b>B3748</b>		370	103,5		100/3000		
<b>B3948</b>		390	110		100/2500		
<b>B4348</b>		430	122,5		100/2000		
<b>B5348</b>	7,6	530	160	550	100/1000		
<b>B1576</b>		150	24		100/1000		
<b>B2076</b>		200	51		100/800		
<b>B2976</b>		300	83		100/600		
<b>B3776</b>		370	103,5		100/1500		
<b>B4576</b>		450	1305		100/2500		
<b>B5476</b>		540	159		100/500		
<b>B7576</b>		750	226		100/100		
<b>B4390</b>		9	430		130,5	800	100/100
<b>B5390</b>			550		163,5		100/100
<b>B7190</b>	8,8	710	195	800	100/100		
<b>B7890</b>		780	235,5		100/100		
<b>B8190</b>		810	245		100/100		
<b>B1090</b>	9	1020	295	800	100/100		
<b>B1290</b>		1220	375,5		100/100		
<b>B1590</b>		1530	460		100/100		

**\* A RICHIESTA**

Le fascette possono essere fornite anche in buste da 1000 pezzi. Per questa configurazione aggiungere la lettera M al codice prodotto.

Esempio: **B0824** 100 pz  
**B0824M** 1000 pz

**\* AVAILABLE ON REQUEST**

Cable ties can also be supplied in 1000-piece bags. Please add the letter M to product code.

Example: **B0824** 100 pcs  
**B0824M** 1000 pcs.



file n° E 223175