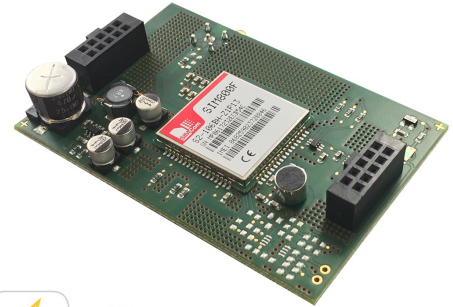


Codice articolo: 9512-GOLD-GSM**Descrizione del prodotto:** Scheda combinatore GSM centrali Serie GOLD**Caratteristiche principali:** Scheda programmatore telefonico GSM da alloggiare all'interno delle centrali della Serie GOLD 869, completa di TTS (Text To Speech), messaggi vocali sullo stato allarme e risponditore, rubrica di 16 numeri, credito residuo della SIM attraverso SMS.

CARATTERISTICHE TECNICHE

- Messaggio vocale: allarme BUS, allarme 24 h, allarme
- Registrazione messaggi vocali: tramite TTS (Text To Speech)
- Programmazione scheda combinatore: tramite GOLD-SOFT o display tastiera nel caso di TOSCA GOLD
- Memoria telefonica: 16 utenti
- Blocco allarme: da tastiera locale nel caso di TOSCA GOLD o da terminale remoto
- Credito residuo: segnalazione tramite SMS
- Azioni effettuabili da remoto tramite SMS ed APP LinceGSM scaricabile da Apple Store e Google Play Store
 - Richiesta stato impianto
 - Attivazione e disattivazione impianto
 - Attivazione e disattivazione dei singoli programmi
 - Inclusione ed esclusione della singola zona (filare o radio)
 - Richiesta del credito disponibile
 - Richiesta scadenza SIM
 - Attivazione ascolto ambientale
 - Allarme antipanico
 - Blocco Allarmi
 - Commutazione e interrogazione stato carichi
 - Gestione rubrica
 - Modifica ora/data
 - Memoria eventi Impostazioni

**BS OHSAS 18001:2007**
Occupational Health and
Safety Management System**ISO 14001:2015**
Environmental Management
System**ISO 9001:2015**
Quality Management
System**CI ITPI: 2015**
100% Made in Italy
Certificate**LINCE ITALIA S.p.A.**Via Variante di Cancelliera s.n.c., 00072 Ariccia (RM) Italia
Tel.: +39 06 92928252 - Fax: +39 06 92942586www.lince.net - info@lince.net
MD-03.11 Rev. 6 - Pag.: 1 di 2

Item Code: 9512-GOLD-GSM**Product description:** GSM dialer board for GOLD Series control panels**Main features:** GSM telephone dialer board to be housed inside the GOLD 869 Series control panels, complete with TTS (Text To Speech), voice alarm and responder status messages, 16 phone numbers stored, residual credit of the SIM through SMS.

SPECIFICATIONS

- Voice message: BUS alarm, 24 h alarm, alarm
- Recording voice messages: via TTS (Text To Speech)
- Dialer board programming: via GOLD-SOFT or keyboard display in the case of TOSCA GOLD
- Telephone memory: 16 users
- Alarm lock: from local keyboard in the case of TOSCA GOLD or from remote device
- Residual credit: notification via SMS
- Actions that can be carried out remotely via SMS or APP LinceGSM from Apple Store and Google Play Store:
 - System status request
 - System activation and deactivation
 - Activation and deactivation of individual programs
 - Inclusion and exclusion of the single zone (wired or wireless)
 - Available credit request
 - SIM expiration request
 - Activation of environmental listening
 - Panic alarm
 - Alarm Lock
 - Load status switching and interrogation
 - Stored phone numbers management
 - Time/date modification
 - Events memory Settings

**BS OHSAS 18001:2007**
Occupational Health and
Safety Management System**ISO 14001:2015**
Environmental Management
System**ISO 9001:2015**
Quality Management
System**CI ITPI: 2015**
100% Made in Italy
Certificate**LINCE ITALIA S.p.A.**Via Variante di Cancelliera s.n.c., 00072 Ariccia (RM) Italia
Tel.: +39 06 92928252 - Fax: +39 06 92942586www.lince.net - info@lince.net
MD-03.11 Rev. 6 - Pag.: 2 di 2